



MTC-F Series IDE/SATA Daisy-Chain Duplicator and Sanitizer

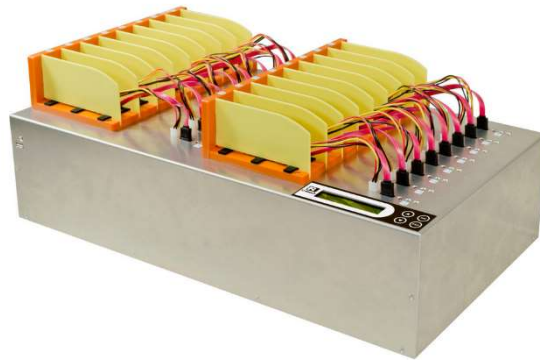

Product Features

Features	Descriptions
Operation Type	<ul style="list-style-type: none"> • Stand-alone, FPGA-based operation (Non-PC based system design).
Controller Design	<ul style="list-style-type: none"> • Embedded controller is designed to support capacities over 18TB+. • Constant improvement supports latest market-available devices.
Patented Daisy-Chain Design	<ul style="list-style-type: none"> • A scalable and modular system enables expansive ownership flexibilities.
Bandwidth Performance	<ul style="list-style-type: none"> • Speed transfers of up to 15.0GB/min. (250MB/sec.) • Dedicated bandwidth enables high-volume replications without speed degradation.
Read-Only Source Port	<ul style="list-style-type: none"> • There is no option to disable this built-in feature and it is integrated with all U-Reach duplicators.
Modular Cabling Design	<ul style="list-style-type: none"> • Modular-designed ports effectively reduce downtime and is cost-effective for long-term ownership.
Real-Time PC Monitoring	<ul style="list-style-type: none"> • View live status for: writing/reading speeds, total capacity, current function progress per port.
Event Log Management	<ul style="list-style-type: none"> • Records: operating durations, individual port copy progressions, connected device models, capacities, serial numbers, and PASS or FAIL results. • Device writing/reading speeds are recorded. • Log report files are generated through the front USB port and are saved to USB devices.

Product Models

Photos	Models	Target Ports
	MTC1500F	1:15

Product Functions

Functions	Descriptions
4 Copy Modes	<ul style="list-style-type: none"> • <u>Quick Copy (Data & System)</u>: Supports Windows, Mac, and Linux. • <u>All Partitions</u>: Users can skip HPA or unknown partitions. • <u>Whole Device</u>: Copies bit-by-bit from the master device. • <u>Percentage Copy</u>: Users can set percentages of capacity to be copied.
Compare (Verification)	<ul style="list-style-type: none"> • Bit-by-bit data comparison from the source device to target device(s).
7 Sanitization Modes	<ul style="list-style-type: none"> • Quick Erase • Full Erase (NIST 800-88) • DoD3 Pass (DoD 5220.22-M) • DoD3 Pass+Compare (DoD 5220.22-M) • DoD7 Pass [DoD 5220.22-M(ECE)] • Secure Erase (NIST 800-88) • Enhanced Secure Erase
Bad Sector Scan	<ul style="list-style-type: none"> • Scans device for any bad sectors by reading and writing.
Thorough Sector Scan	<ul style="list-style-type: none"> • Scans device for any bad sectors by reading and writing two times.
Skip Bad Sectors	<ul style="list-style-type: none"> • Choose the number of bad sectors to skip.
Minimum Speed	<ul style="list-style-type: none"> • Disable or set minimum threshold speed to drop the slowest device.
Check Source Minimum Speed	<ul style="list-style-type: none"> • Allows user to enable or disable the source speed check.
Unknown Format	<ul style="list-style-type: none"> • Choose to copy or skip unknown formats.
Erase Source Port	<ul style="list-style-type: none"> • Enable or disable source port from being erased.
Device Power-up	<ul style="list-style-type: none"> • Choose time to wait for the device to power up prior to copy, erase, etc.
Device Power-down	<ul style="list-style-type: none"> • Choose time to wait for the device to power down prior to disconnection.
Scroll Lock	<ul style="list-style-type: none"> • Disable or enable ▲ and ▼ buttons on the control panel.
HPA Copy Modes	<ul style="list-style-type: none"> • Allows user to choose various HPA replication methods.
Clear HPA at Erase	<ul style="list-style-type: none"> • Keep or clear HPA settings during sanitization process.
Language	<ul style="list-style-type: none"> • English or Japanese.
Transfer Modes	<ul style="list-style-type: none"> • Allows user to select the transfer rate.
Log Manager	<ul style="list-style-type: none"> • Manage and export log reports.

Product Compatibilities

Compatibilities	Descriptions
Compatible Devices	<ul style="list-style-type: none"> • 1.8"/2.5"/3.5" eSATA/SATA HDDs and SSDs
Compatible Devices (Requires Optional Adapters)	<ul style="list-style-type: none"> • 1.8" ZIF HDD/SSD, 2.5"/3.5" IDE, iVDR, mSATA SSD, MicroSATA, M.2 (NGFF), CFast, and Panasonic CF-29 through CF-74.
Supported Formats	<ul style="list-style-type: none"> • Quick Copy Function: FAT16/32/64, Windows (NTFS), Linux (Ext2/Ext3/Ext4), and Mac (HFS, HFS+, HFSX). • Whole Device Copy Function: All Formats, including proprietary formats. • GPT, MBR, and Advanced Formats.
Supported O/S	<ul style="list-style-type: none"> • All (Windows, Mac, Linux, and other proprietary systems).

Product Specifications

Specifications	Descriptions
LCD Display	<ul style="list-style-type: none"> • Backlit Monochrome LCD Display
LEDs	<ul style="list-style-type: none"> • 3 LED Indicators per Port: • Yellow (Power), Green (Pass), and Red (Fail)
Daisy-Chain Connector	<ul style="list-style-type: none"> • Mini-SAS (SFF-8088)
Control Panel	<ul style="list-style-type: none"> • 4 Push Buttons (▲, ▼, OK, ESC)
Power Requirements	<ul style="list-style-type: none"> • <u>Universal Power</u>: 115VAC or 230VAC, 50/60Hz
Operational Temperature	<ul style="list-style-type: none"> • 0°C ~ 60°C (32°F ~ 140°F)
Non-operational Temperature	<ul style="list-style-type: none"> • -20°C ~ 85°C (-4°F ~ 185°F)
Humidity	<ul style="list-style-type: none"> • <u>Operating</u>: 20% ~ 95%, non-condensing • <u>Non-operating</u>: 5% to 95%, non-condensing
Packaging Dimensions (LxWxH)	<ul style="list-style-type: none"> • <u>MTC1500F</u> – 740 mm x 520 mm x 380 mm (29.1 in. x 20.5 in. x 15 in.)
Product Weight	<ul style="list-style-type: none"> • <u>MTC1500F</u> – 13.1 kg (28.9 lbs.)
Certifications	<ul style="list-style-type: none"> • FCC, CE, RoHS, and REACH
MIL-STD-810G	<ul style="list-style-type: none"> • 501.5 / 502.5 / 507.5 / 514.6 / 516.6

Product Replacement Parts

Part Numbers	Descriptions
TBA	<ul style="list-style-type: none"> • TBA

More Information

For additional details on the U-Reach® MTC-F Series, please visit: <http://www.ureach-usa.com/MT%20-sata-hard-disk-drive-duplicator-eraser-1-to-15-MTC1500F.html>

Specifications are subject to change without notice.